




REGO-FIX ATC-E 15 / HSK-EZ 15 Program

Complete micro-machining program range as per DIN SPEC 28999

Standard range ATC-E 15

5915.20600 ATC-E 15/SR 6 x 022 (SR System)

- // Clamping diameter 1–3 mm and 1/8"
- // Smallest possible outer diameter (O.D.)




ATC-E 15/SR 6 x 022



SR 6

2915.10800 ATC-E 15/ERMS 8 x 021 (ER System)

- // Clamping diameter 0.2–5 mm
- // All advantages as per ER 8 (DIN 6499)




ATC-E 15/ERMS 8 x 021



ER 8-UP

2915.11100 ATC-E 15/ERMS 11 x 024 (ER System)

- // Clamping diameter 0.2–7 mm
- // All advantages as per ER 11 (DIN 6499)




ATC-E 15/ERMS 11 x 024



ER 11-UP or MR 11

2915.70600 ATC-E 15/PG 6 x 034 (powRgrip® System)

- // Clamping diameter 0.2–4 mm
- // Excellent concentricity and clamping force thanks to PG




ATC-E 15/PG 6 x 034



powRgrip® PG 6




All ATC-E 15 products are compatible with HSK-EZ as per DIN SPEC 28999:2023-5

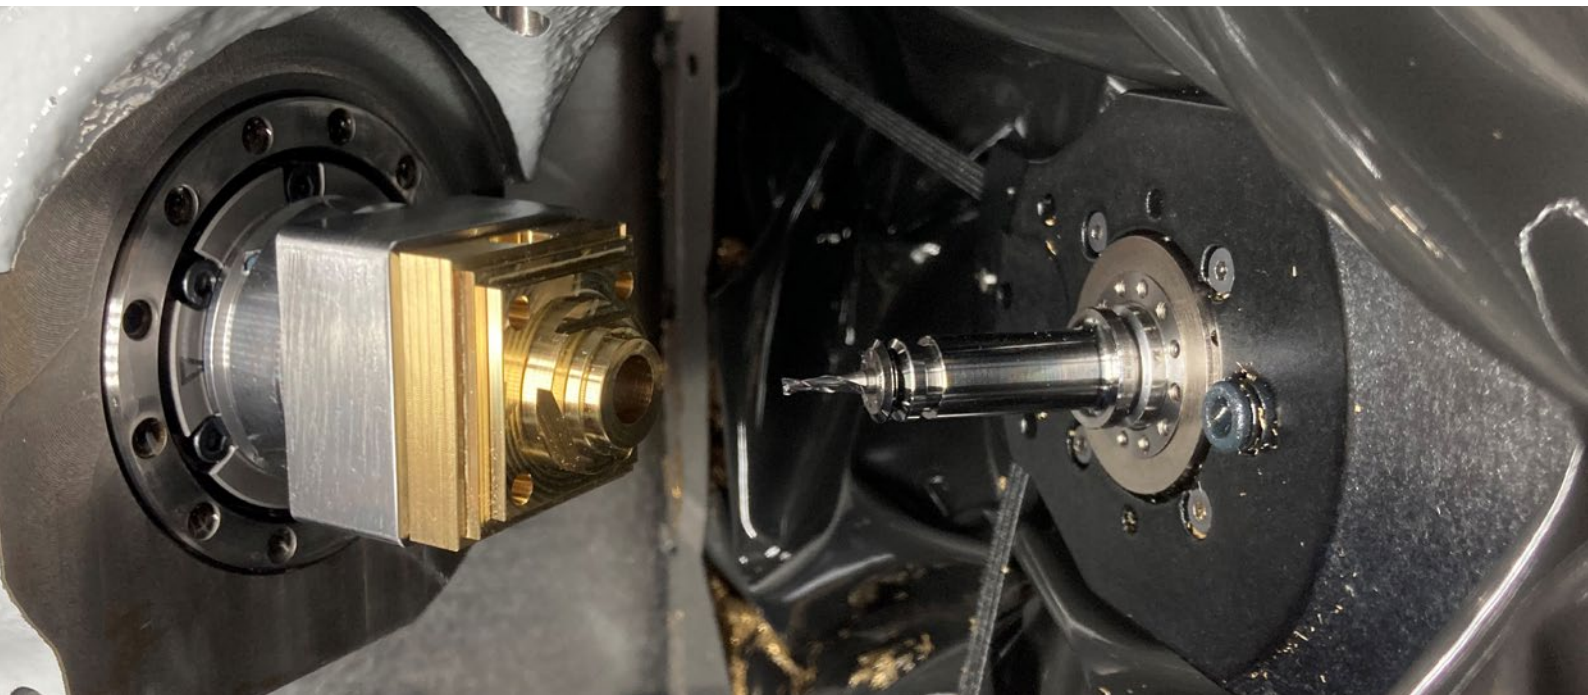

Standard range HSK-EZ 15 and HSK-AZ 15

5515.20604 HSK-EZ 15/SR 6 x 022 (SR System)

- // Clamping diameter 1–3 mm and 1/8"
- // Smallest possible outer diameter (O.D.)




HSK-EZ 15/SR 6 x 022



SR 6

2515.10804 HSK-EZ 15/ERMS 8 x 021 (ER System)

- // Clamping diameter 0.2–5 mm
- // All advantages as per ER 8 (DIN 6499)




HSK-EZ 15/ERMS 8 x 021



ER 8-UP

2515.11104 HSK-EZ 15/ERMS 11 x 024 (ER System)

- // Clamping diameter 0.2–7 mm
- // All advantages as per ER 11 (DIN 6499)




HSK-EZ 15/ERMS 11 x 024



ER 11-UP or MR 11

2515.70604 HSK-EZ 15/PG 6 x 034 (powRgrip® System)

- // Clamping diameter 0.2–4 mm
- // Excellent concentricity and clamping force thanks to PG




HSK-EZ 15/PG 6 x 034



powRgrip® PG 6

2915.10807 HSK-AZ 15/ERMS 8 x 021 (ER System)

- // Clamping diameter 0.2–5 mm
- // All advantages as per ER 8 (DIN 6499)
- // With orientation notch (HSK-A)




HSK-AZ 15/ERMS 8 x 021



ER 8-UP

2915.11107 HSK-AZ 15/ERMS 11 x 024 (ER System)

- // Clamping diameter 0.2–7 mm
- // All advantages as per ER 11 (DIN 6499)
- // With orientation notch (HSK-A)



HSK-AZ 15/ERMS 11 x 024




ER 11-UP or MR 11

Accessories

MasterBar runout test arbor

7556.15900 ATC-E – HSK-EZ 15 / MBA 10 x 070 (Measuring Technology)

- // High-Precision TIR spindle test arbor
- // Cylindricity $\leq 2 \mu\text{m}$ / Runout $\leq 3 \mu\text{m}$
- // Digital access to product information

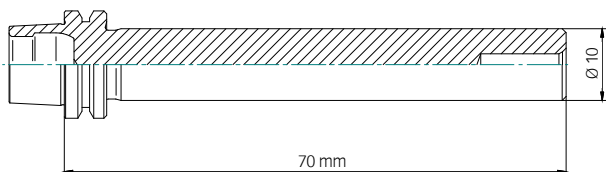

ATC-E 15/MBA 10 x 070

Spindle taper cleaner

7831.15300 STC/ATC-E – HSK-EZ 15

- // Easy spindle cone cleaner with fleece head




STC/ATC-E 15

Spanners for MS nuts


- // Genuine spanner to properly clamp MS nut on toolholder

- 7864.06000 WMS 6
- 7114.08000 E 8 MS
- 7114.11000 E 11 MS

- 7150.02025 Torque wrenches TORCO-FIX 0
- 7154.08000 Wrench heads A-E 8 MS
- 7154.11000 Wrench heads A-E 11 MS

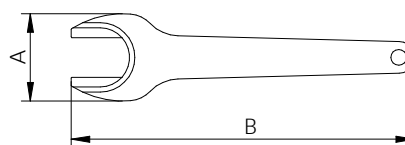

E MS

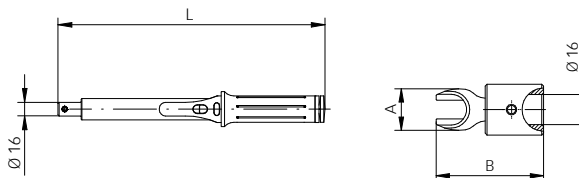

Torque wrenches

Wrench heads

Size	Ø [mm]	[Nm]
Recommended tightening torque		
SR 6	1.0 – 3.0 and 1/8"	4
ER 8 MB	0.2 – 0.9	6
ER 8-UP	1.0 – 5.0	6

Size	Ø [mm]	[Nm]
Recommended tightening torque		
ER 11 MB	0.2 – 0.9	8
ER 11-UP	1.0 – 7.0	10



Defining precision in a new dimension

INNOVATIVE


In 1972 REGO-FIX invented and introduced the ER collet, which became the industry standard according to DIN 6499 worldwide.

PRECISE

Thanks to our long tradition and experience in manufacturing high-precision clamping systems, REGO-FIX offers a wide range for the ATC-E 15/HSK-EZ 15 interface.

ATC-E 15/HSK-EZ 15 HOLDER


Fast, precise and optimised for micro-machining, REGO-FIX offers a complete program of toolholders for the high RPM environments.




Balanced up to 80000 revolutions per minute



100% manufactured in Switzerland



Clamping diameters from 0.2–7 mm



Available in SR 6, ER 8, ER 11 and powRgrip® PG 6

