


KAV Series

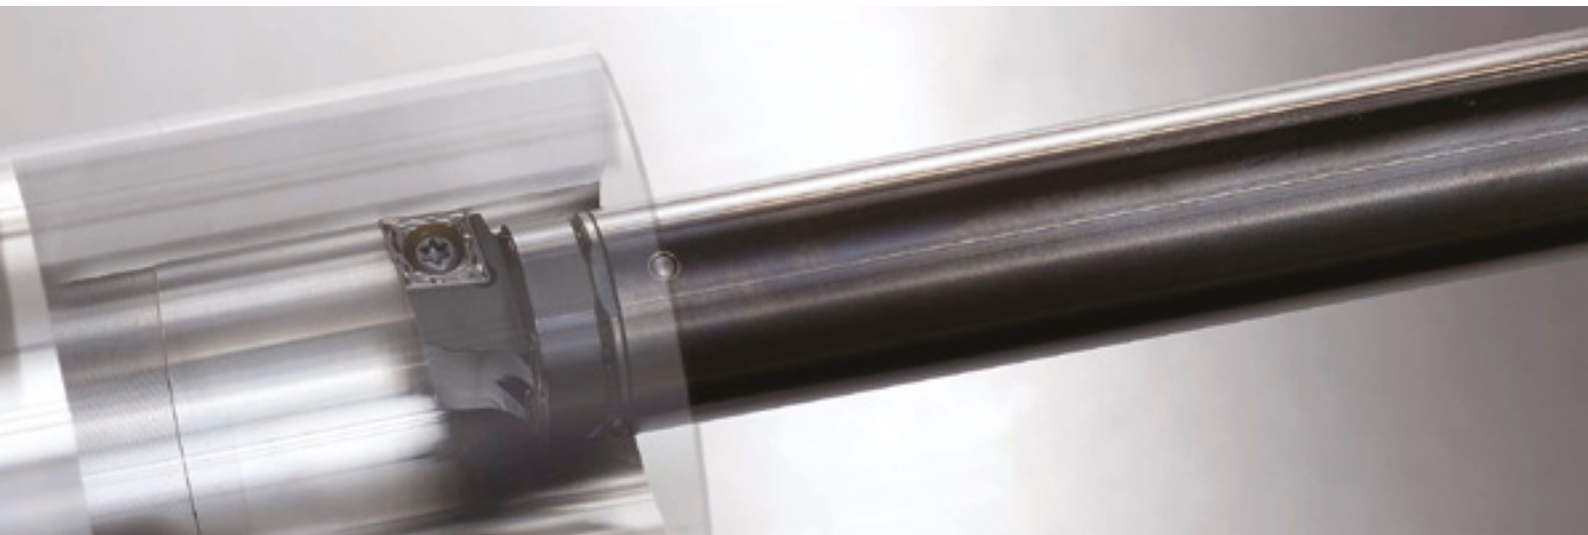

»Max L/D = 10« Solves deep-boring challenges with superior chatter resistance

Unique anti-vibration mechanism provides superior anti-chatter performance

Shank diameters from 16 mm to 40 mm (Max L/D = 7, 10)

Variety of internal machining processes possible with interchangeable heads

Strong hold with serrated joint structure

Easy cutting edge adjustment with E-Sleeve design

Easy machining setup.



SCLP type heads

**KEEPS YOU
AHEAD**



Interchangeable head boring bars with anti-vibration dampener system

KAV Series

»Max L/D = 10« Solves deep-boring challenges

Excellent anti-chatter performance due to unique anti-vibration design and available for a wide range of machining operations


Anti-vibration Controlled deep boring



Shank line-up

Shank diameters from 16 mm to 40 mm with L/D = 7 and 10, are available.
Carbide reinforced style also available.

Shank diameter	Available overhang length range	Type
Ø16 Ø20	 L/D = 4 ~ 7	Steel
	 L/D = 7 ~ 10	Carbide reinforcement
Ø25 Ø32 Ø40	 L/D = 4 ~ 7	Steel
	 L/D = 7 ~ 10	Steel

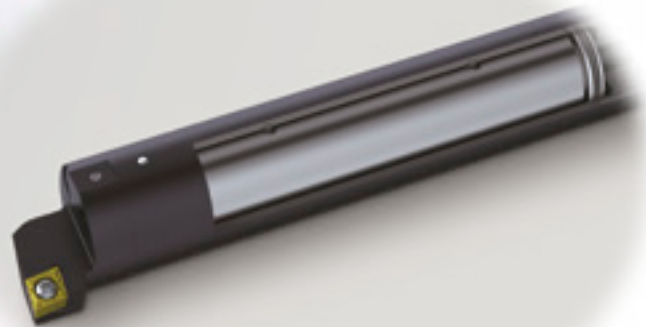

Unique anti-vibration mechanism

Built-in proprietary damper technology dampens vibration.
Superior anti-chatter performance over carbide.



Interchangeable head type

Interchangeable heads for a variety of machining applications.
Strong fastening with serrated joint structure.

1

Unique anti-vibration mechanism provides superior chatter resistance

Unique vibration isolation mechanism that ensures rigidity with high dampening performance


Built-in damper technology

Absorbs vibrational energy with braking effect


High rigidity

Using heavy and short dampers
The cavity diameter is also reduced to ensure rigidity.

Principle of vibration suppression by anti-vibration mechanism (Image)

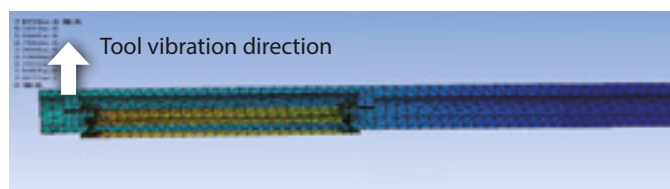

The damper vibrates late against the shank. Effective for vibration damping!

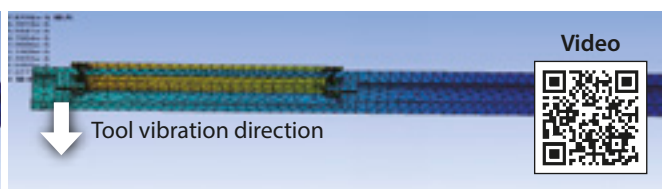



Available up to $L/D = 10$. Excellent anti-vibration performance over conventional carbide shanks

Hammering test (Internal evaluation)

Hammer impacts to the head of the tool ($\varnothing 20$, Overhang length 10D)



Vibration measurement direction

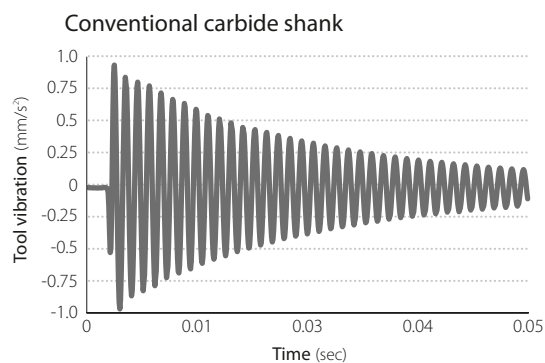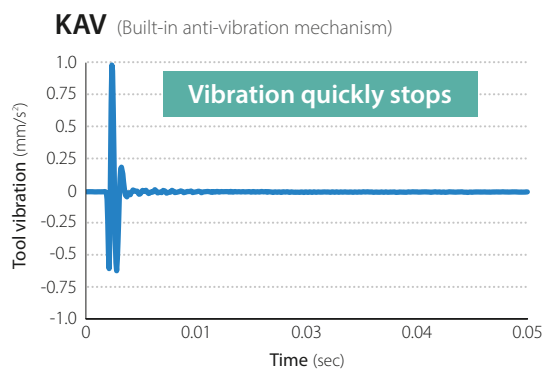

10D Shank Anti-vibration performance (Internal evaluation)


KAV maintains stable machining



KAV-G20-10D / KAVH20-SCLCR09
CCMT09T304PP
Overhang length: 140 mm (7D) / 200 mm (10D)
Workpiece: SCM435


Stable machining area map

(Overhang length 10D, $ap = 0.4$ mm)

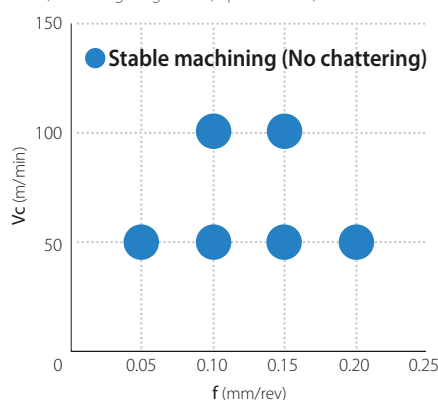

Stable machining area map

(Cutting speed $V_c = 100$ m/min.)

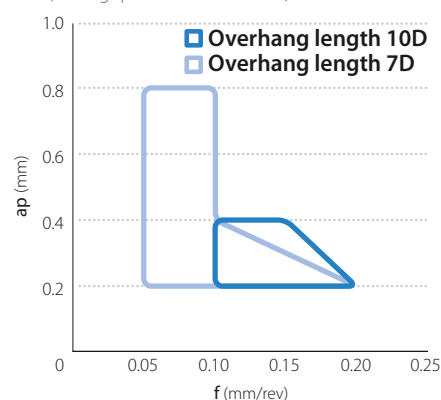

Unique anti-vibration mechanism provides superior anti-chatter performance against competitors

Anti-vibration performance comparison (Internal evaluation)


Competitors produced chattering.
KAV maintains stable machining.



KAV






Competitor A (Anti-vibration type)

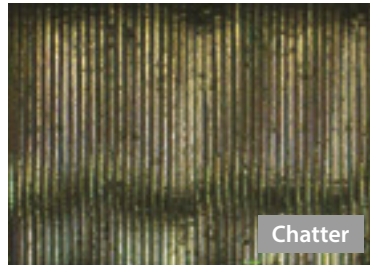

Competitor B (Anti-vibration type)



Surface roughness

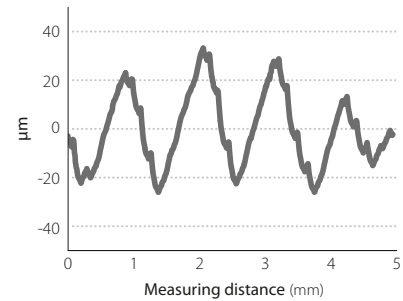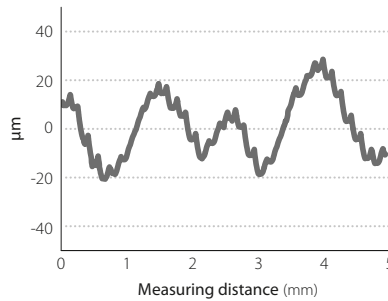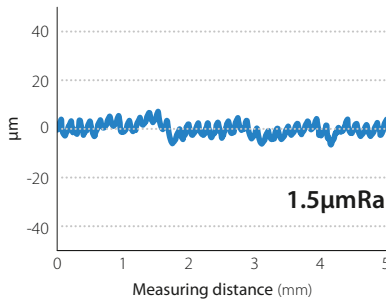

Cutting conditions: $V_c = 150$ m/min., $a_p = 0.4$ mm, $f = 0.15$ mm/rev. Workpiece: SCM435. Overhang length 320 mm.

Case Studies

① Mechanical parts (Worm gears) S45C

Shank: KAV-G16-10D
Head: KAVH16-SDUCR07
Insert: DCGT070202EL-U (PV720)

$V_c = 50$ m/min.
 $a_p = 0.05$ mm
 $f = 0.2$ mm/rev Wet

Overhang length: Ø16 – 160 mm (10D)



(User evaluation)

② Mechanical parts (Worm gears) SCM435

Shank: KAV-D32-10D
Head: KAVH32-PDUNR11
Insert: DNMG110404HQ (CA515)

$V_c = 180$ m/min.
 $a_p = 0.15$ mm
 $f = 0.2$ mm/rev Wet

Overhang length: Ø32 – 200 mm (6.2D)



(User evaluation)

③ Auto parts (Differential case) FCD700

Shank: KAV-G20-10D
Head: KAVH20-STLPR11
Insert: TPGB110308 (PV7005)

$V_c = 140$ m/min.
 $a_p = 0.2$ mm
 $f = 0.12$ mm/rev Wet

Overhang length: Ø20 – 160 mm (8D)



(User evaluation)

2

Interchangeable heads for a variety of machining applications.
Strong fastening with serrated joint structure.

Serrated structure



Securely fastens head and shank.



Internal coolant recommended

Internal coolant recommended to prevent damage to anti-vibration mechanism

When using our plumbing parts: Supports pressures up to 7 MPa (some items are only recommended up to 1 MPa).



Coolant pipe connections: See page 14

Head line-up

Shank diameter	Positive type (Screw clamp)					Negative type (Lever lock)		
	SCLC	SCLP	SDUC	STLP	SVUB	PCLN	PDUN	PTFN
Ø16	●	●	●	●				
Ø20	●	●	●	●	●			
Ø25	●	●	●	●	●			
Ø32	●	●	●	●	●	●	●	●
Ø40	●	●	●	●	●	●	●	●

3

Easy cutting edge adjustment with E-Sleeve.
Smooth machining setup.


E-Sleeve (Sold separately)

Separated structure with printed reference lines.
Easy adjustment reduces setup time.

Adjusting the cutting edge position

Exclusive Sleeve (E-Sleeve)


Adjusting the cutting edge position with a reference line

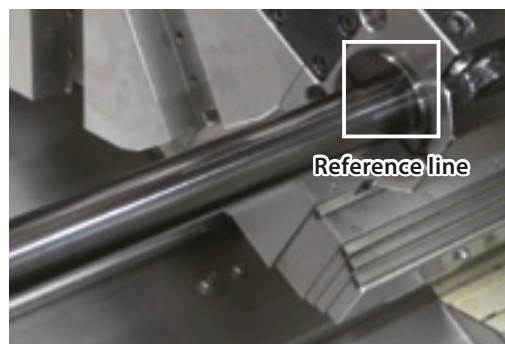

Instruction video

Adjusting the cutting edge position is easy by simply aligning the reference line between the shank and the sleeve.

Reference line

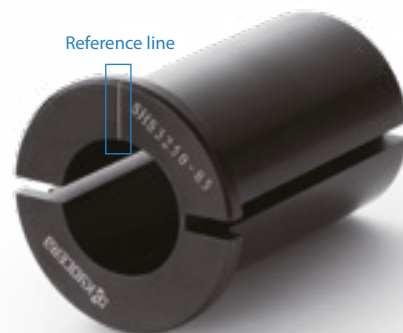

Conventional sleeve


Adjusting the cutting edge position with the flat cut part of the head




Instruction video

Adjust the flat cut part of the head by moving the tool while applying a dial gauge, etc.

Replaceable boring bar head identification system

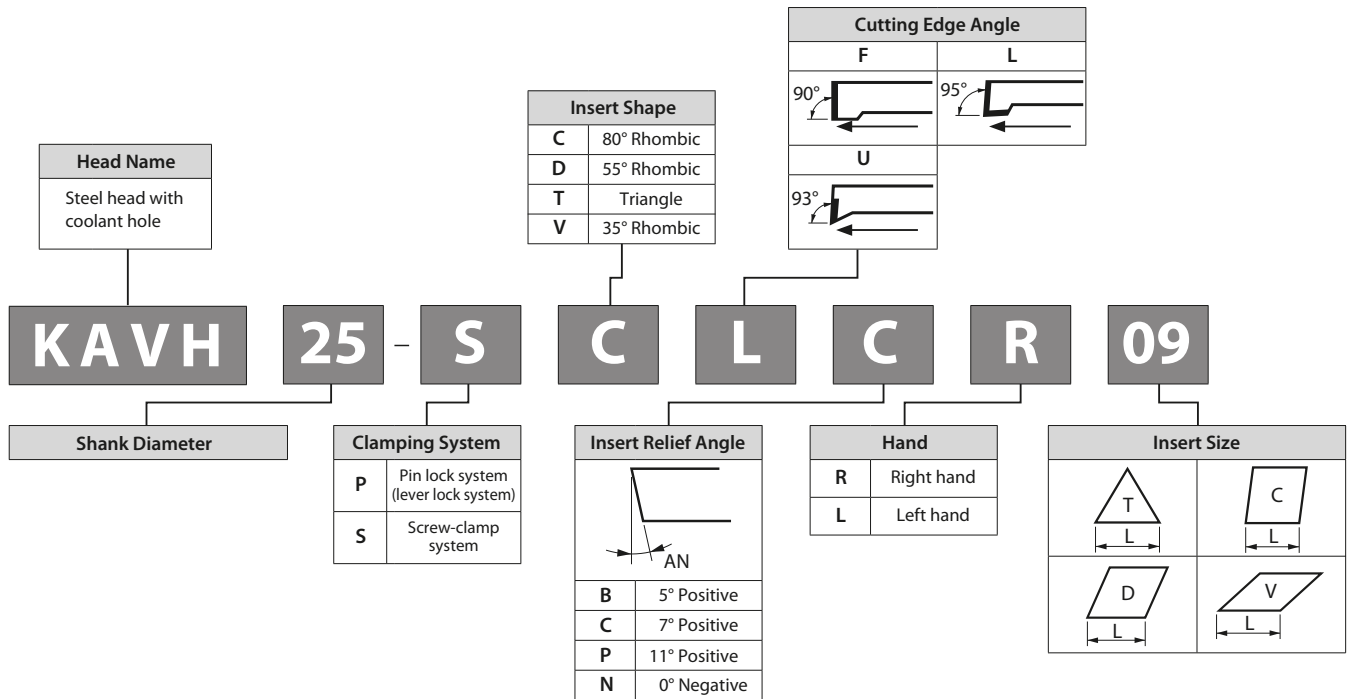

Sleeve for KAV (E-Sleeve)

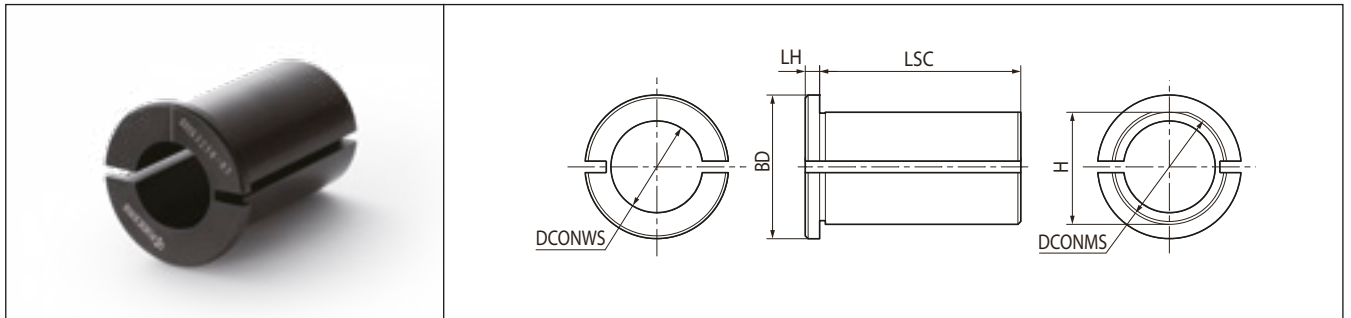


Sleeve dimensions

Description	Stock	Dimensions (mm)						Applicable shank
		DCONMS	DCONWS	BD	LSC	LH	H	
SHS	1640-75	40	16	50	70	5	39	KAV-D16-7D
	2040-75		20					KAV-G16-10D
	2540-75		25					KAV-D20-7D
	3240-75		32					KAV-G20-10D
SHS	2550-85	50	25	60	80	5	48.5	KAV-D25-7D/10D
	3250-85		32					KAV-D32-7D/10D
	4050-85		40					KAV-D40-7D/10D


Choose the sleeve DCONWS together with the shank DCONMS.

●: Standard stock

KAVH-SCLC (Internal / Internal facing, Screw clamp)

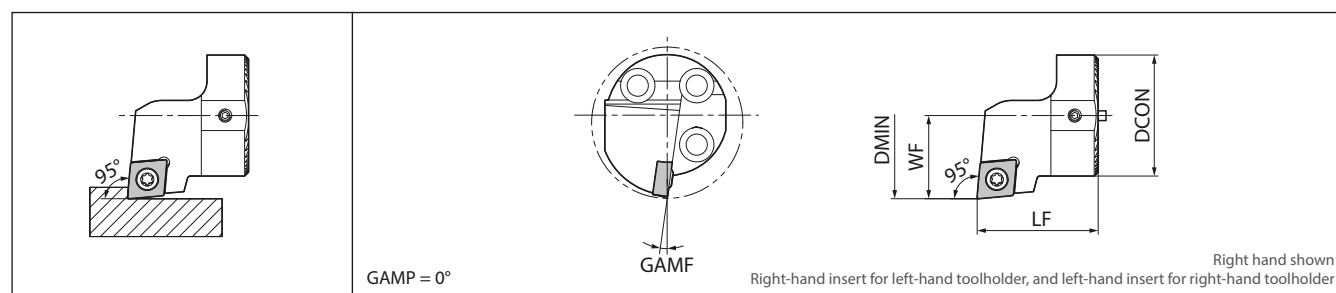

Toolholder dimensions


Description	Stock		Dimensions (mm)				GAMP (°)	Standard corner R (RE)	Spare parts		Applicable shank	Applicable insert
	R	L	DMIN	DCON	LF	WF			Clamp screw	Wrench		
												
KAVH 16-SCLC R/L 06	●	●	20	16	20	11	-7	0.4	SB-2545TR	FT-8	KAV-D16/G16...	CC ☐ T0602... CC ☐ W0602...
KAVH 20-SCLC R/L 09	●	●	25	20	20	13	-8	0.4	SB-4065TR	FT-15	KAV-D20/G20...	CC ☐ T09T3... CC ☐ W09T3...
25-SCLC R/L 09	●	●	32	25		17					KAV-D25...	
32-SCLC R/L 09	●	●	40	32	32	22					KAV-D32...	
40-SCLC R/L 09	●	●	50	40		27	-7				KAV-D40...	

When using the P chipbreaker, use right-hand insert for right-hand toolholder and left-hand insert for left-hand toolholder.

●: Standard stock

KAVH-SCLP (Internal / Internal facing, Screw clamp)

NEW

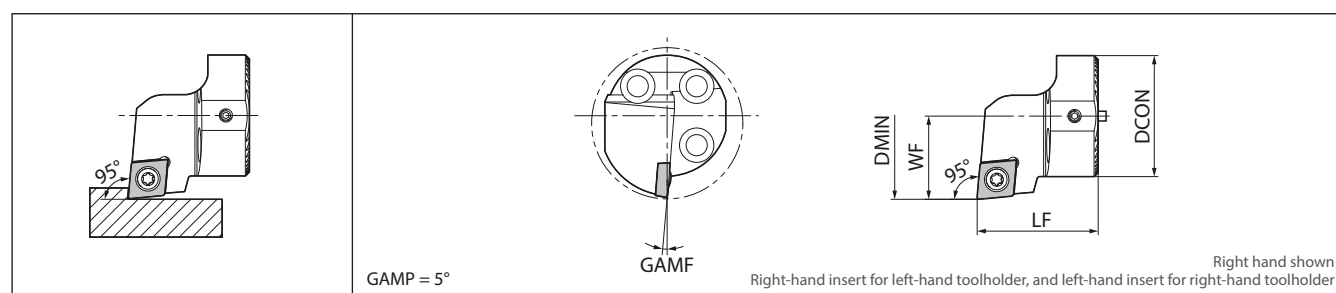


Toolholder dimensions


Description		Stock		Dimensions (mm)			GAMF (°)	Standard corner R (RE)	Spare parts		Applicable shank	Applicable insert	
		R	L	DMIN	DCON	LF			WF	Clamp screw			Wrench
													
KAVH	16-SCLP R/L 08	●	●	20	16	20	11	-5	0.4	SB-3060TR	FT-10	KAV-D16/G16...	CP ☐ B0802... CP ☐ H0802... CP ☐ T0802...
KAVH	20-SCLP R/L 09	●	●	25	20	20	13	-5	0.4	SB-4065TR	FT-15	KAV-D20/G20...	CP ☐ B0903... CP ☐ H0903... CP ☐ T0903...
	25-SCLP R/L 09	●	●	32	25		17					KAV-D25...	
	32-SCLP R/L 09	●	●	40	32	22	KAV-D32...						
	40-SCLP R/L 09	●	●	50	40	27	KAV-D40...						

●: Standard stock

KAVH-SDUC (Copying, Screw clamp)

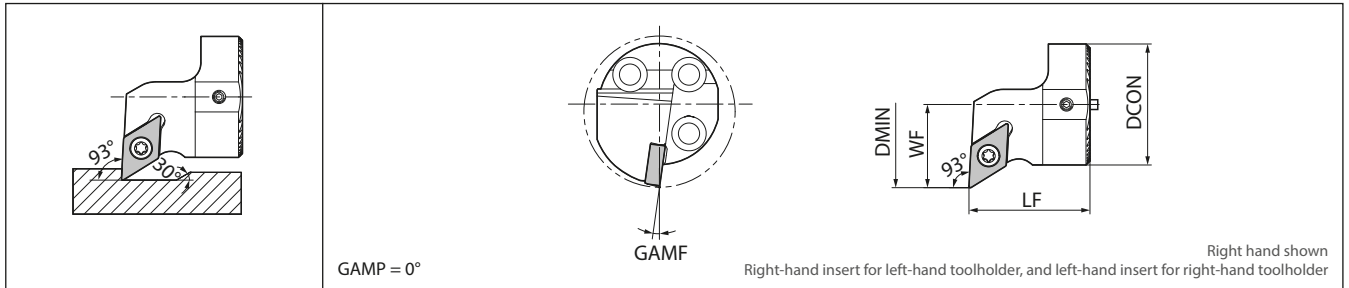


Toolholder dimensions

Description	Stock		Dimensions (mm)				GAMF (°)	Standard corner R (RE)	Spare parts		Applicable shank	Applicable insert
	R	L	DMIN	DCON	LF	WF			Clamp screw	Wrench		
												
KAVH 16-SDUC R/L 07	●	●	20	16	20	11	-7	0.4	SB-2545TR	FT-8	KAV-D16/G16...	DC ☐ T0702... DC ☐ W0702... DC ☐ X0702...
KAVH 20-SDUC R/L 11	●	●	25	20	20	13	-9	0.4	SB-4065TR	FT-15	KAV-D20/G20...	DC ☐ T11T3... DC ☐ W11T3... DC ☐ X11T3...
25-SDUC R/L 11	●	●	32	25		17	-8				KAV-D25...	
32-SDUC R/L 11	●	●	40	32	32	22	-8				KAV-D32...	
40-SDUC R/L 11	●	●	50	40		27	-7				KAV-D40...	

When using a WP chipbreaker, you need to correct the cutting edge position or the machining program.

●: Standard stock

KAVH-STLP (Internal / Internal facing, Screw clamp)

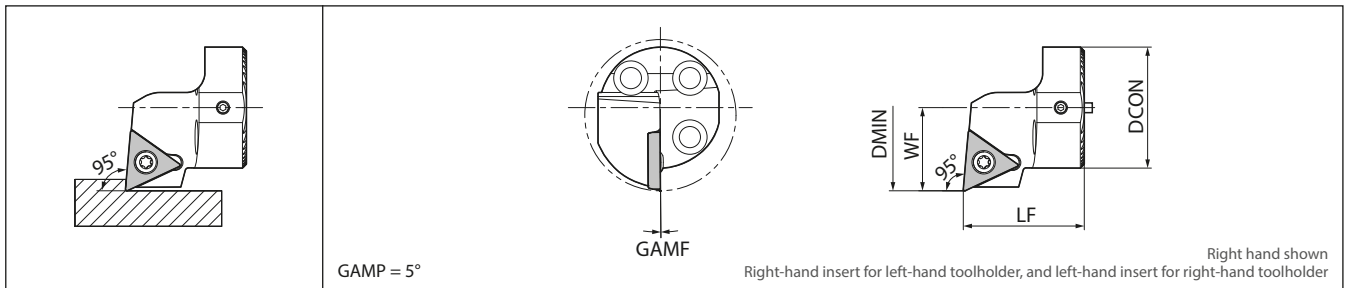


Toolholder dimensions

Description		Stock		Dimensions (mm)			GAMP (°)	Standard corner R (RE)	Spare parts		Applicable shank	Applicable insert	
		R	L	DMIN	DCON	LF			WF	Clamp screw			Wrench
													
KAVH	16-STLP R/L 11	●	●	20	16	20	11	-3.5	0.4	SB-3060TR	FT-10	KAV-D16/G16...	TP ☐ T1103...
	20-STLP R/L 11	●	●	25	20		13	-2		SB-3080TR		KAV-D20/G20...	TP ☐ H1103...
	25-STLP R/L 11	●	●	32	25		17	0				KAV-D25...	TP ☐ B1103... TP ☐ X1103...
KAVH	32-STLP R/L 16	●	●	40	32	32	22	0	0.4	SB-4065TR	FT-15	KAV-D32...	TP ☐ T1603... TP ☐ H1603...
	40-STLP R/L 16	●	●	50	40		27					KAV-D40...	TP ☐ B1603...

When using the P chipbreaker, use right-hand insert for right-hand toolholder and left-hand insert for left-hand toolholder.


●: Standard stock

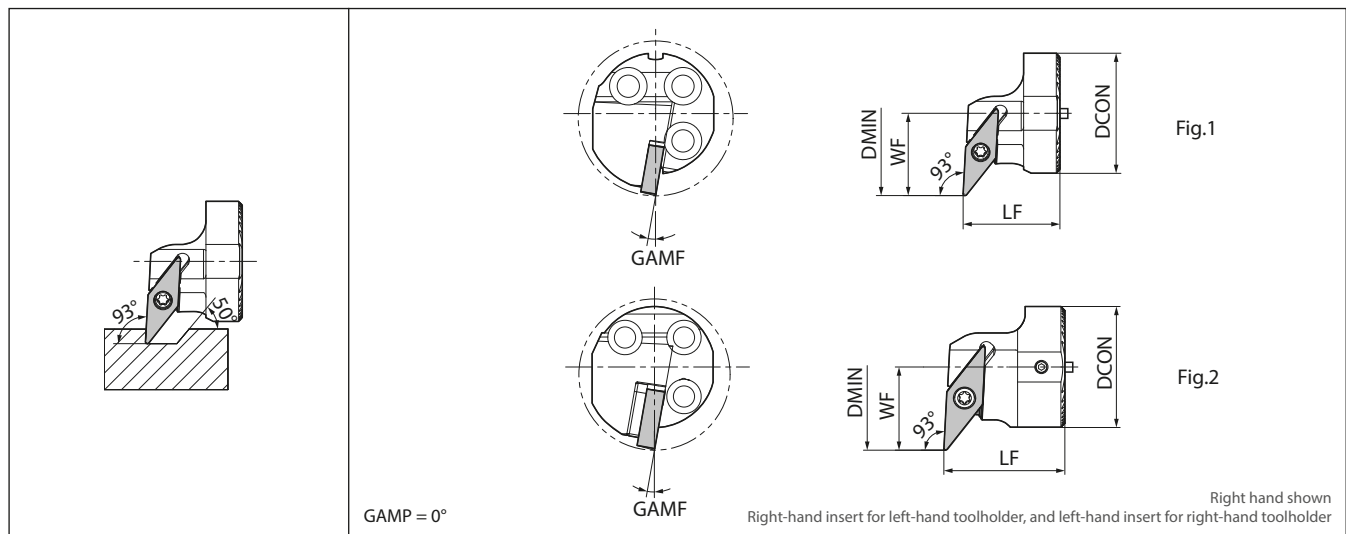
Toolholder dimensions

Description	Stock		Dimensions (mm)				GAMP (°)	Standard corner R (RE)	Spare parts					Shape	Applicable shank	Applicable insert
	R	L	DMIN	DCON	LF	WF			Clamp screw	Wrench	Sheet	Shim screw	Wrench (for shim screws)			
KAVH 20-SVUB R/L 11	●	●	25	20	20	13	-10	0.4	SB-2570TR	FT-8	-	-	-	Fig. 1	KAV-D20/G20...	VB...T1103...
	●	●	32	25		17										VB...W1103...
KAVH 32-SVUB R/L 16	●	●	40	32	32	22	-10	0.4	SB-40125TRN	FT-15	SVN-32N *(SVN-32S)	SS-4N	LW-4	Fig. 2	KAV-D32...	VB...T1604...
	●	●	50	40		27										VB...W1604...
KAVH 40-SVUB R/L 16	●	●	50	40			-9								KAV-D40...	VB...T1604...

When using a corner R (RE) = 0.2 or 0.4 mm insert, we recommend using a sheet marked with * (sold separately).

●: Standard stock

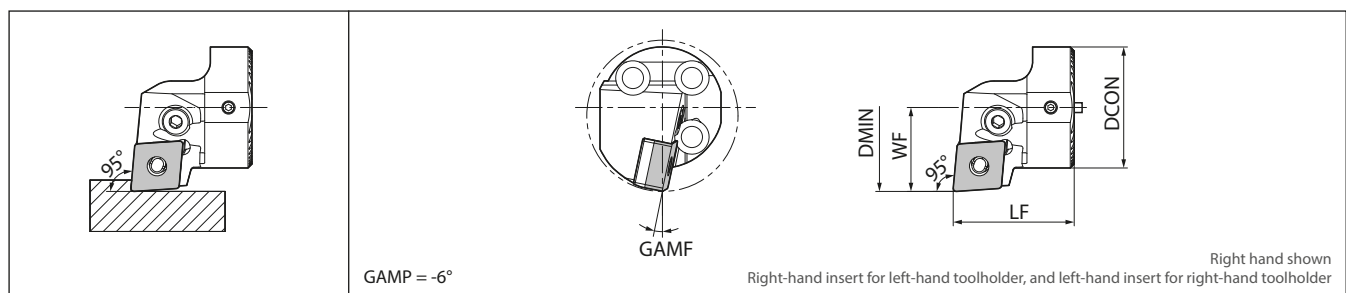
KAVH-PCLN (Internal / Internal facing, Lever lock)

Toolholder dimensions

Description	Stock		Dimensions (mm)				GAMP (°)	Standard corner R (RE)	Spare parts						Applicable shank	Applicable insert
	R	L	DMIN	DCON	LF	WF			Lever	Lock screw	Sheet	Shim pin	Punch	Wrench		
KAVH 32-PCLN R/L 12	●	●	40	32	32	22.2	-11.5	0.8	LL-2N	LS-2N	LC-42N R/L	LSP-2	PC-2	LW-3	KAV-D32...	CN...A1204...
	●	●	50	40		27										CN...G1204...
KAVH 40-PCLN R/L 12	●	●	50	40			-10								KAV-D40...	CN...M1204...

Sheet: LC-42NR for right-hand toolholder, LC-42NL for left-hand toolholder.

●: Standard stock

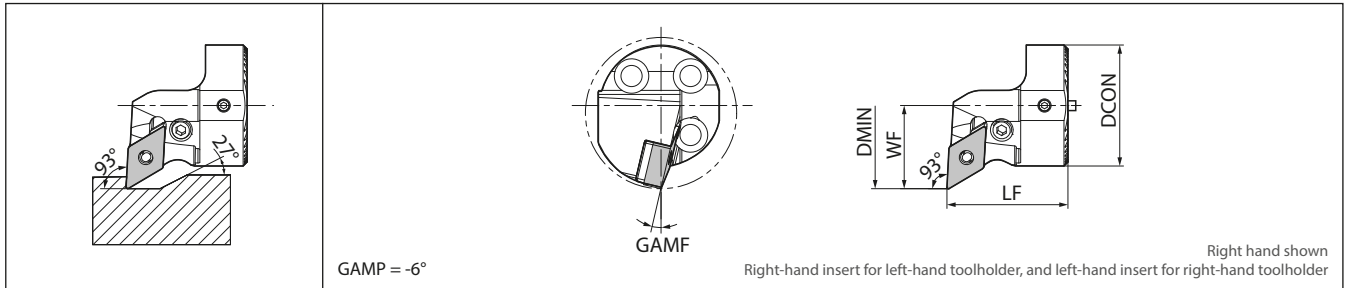KAVH-PDUN (Copying, Lever lock)



Toolholder dimensions

Description		Stock		Dimensions (mm)				GAMF (°)	Standard corner R (RE)	Spare parts						Applicable shank	Applicable insert
		R	L	DMIN	DCON	LF	WF			Lever	Lock screw	Sheet	Shim pin	Punch	Wrench		
																	
KAVH	32-PDUN R/L 11	●	●	40	32	32	22	-13	0.4	LL-1DN	LS-15N	LD-32N	LSP-1	PC-1	FH-2.5	KAV-D32...	DN ☐ G1104...

●: Standard stock


Description		Stock		Dimensions (mm)			GAME (°)	Standard corner R (RE)	Spare parts					Applicable shank	Applicable insert	
		R	L	DMIN	DCON	LF			WF	Wrench	Locking pin	Sheet	Clamp screw			Wrench (For clamp screws)
																
KAVH	32-PDUN R/L 15	●	●	40	32	32	22	-12.5	0.8	LW-3	PP-4	PD-42	SB-2050TR	FT-6	KAV-D32...	DN ☐ A1504...
	40-PDUN R/L 15	●	●	50	40		27								KAV-D40...	DN ☐ G1504...
																DN ☐ M1504...
																DN ☐ X1504...

When using a WF chipbreaker insert, you need to correct the cutting edge position or machining program.

When using inserts with corner-R (RE) greater than 1.6 mm, additional modifications to the sheet are necessary to prevent workpiece and sheet from interfering with each other.

●: Standard stock

KAVH-PTFN (Internal, Lever lock)

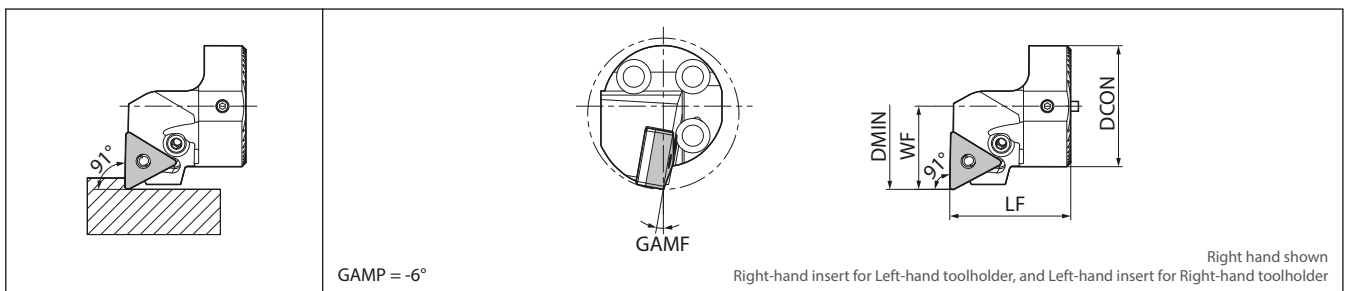


Toolholder dimensions

Description	Stock		Dimensions (mm)				GAMF (°)	Standard corner R (RE)	Spare parts						Applicable shank	Applicable insert	
	R	L	DMIN	DCON	LF	WF			Lever	Lock screw	Sheet	Shim pin	Punch	Wrench			
																	
KAVH	32-PTFN R/L 16	●	●	40	32	32	22	-10	0.8	LL-1N	LS-1N	LT-32N *(LT-32N-20)	LSP-1	PC-1	FH-2.5	KAV-D32...	TN ☐ A1604...
	40-PTFN R/L 16	●	●	50	40		27	-9								KAV-D40...	TN ☐ G1604...
																TN ☐ M1604...	
																TN ☐ X1604...	

* When using inserts with a corner-R (RE) greater than 1.2 mm, purchase a sheet marked with * (sold separately) to prevent workpiece and sheet from interfering with each other.

●: Standard stock

Shank

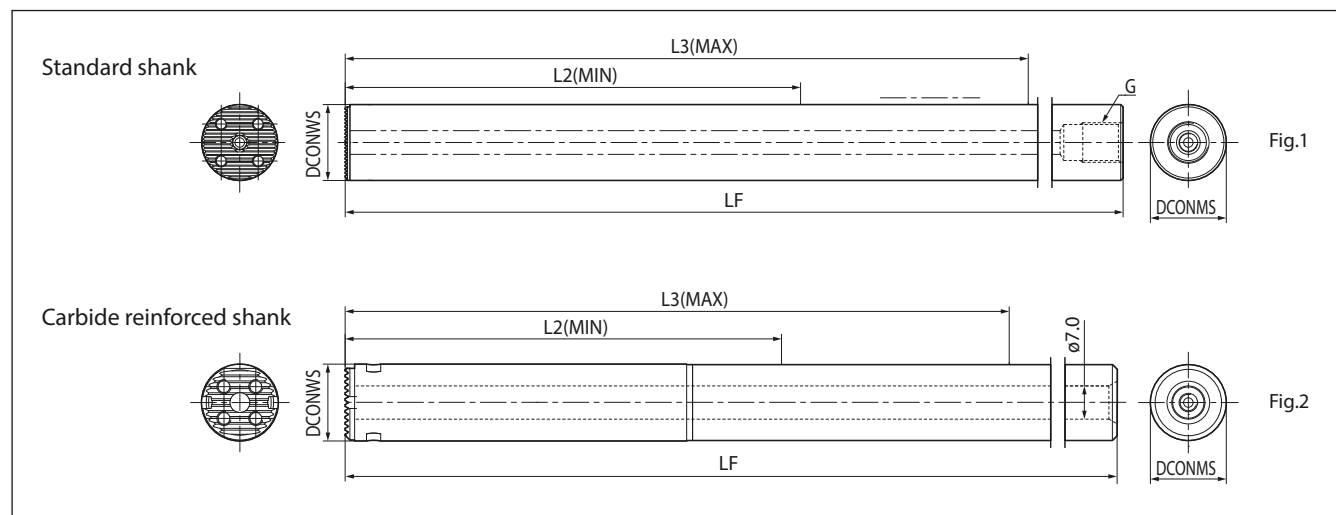

Toolholder dimensions

Description			Stock	Dimensions (mm)						Spare parts			Shape
				DCONWS	DCONMS	LF	L2(MIN) Minimum overhang length	L3(MAX) Maximum overhang length	G	Head fastening bolts (3)	Wrench	O-ring	
													
Standard shank	KAV-	D16-7D		16	16	157.5	44	92	G1/8	HH3X10S	LW-2.5	-	Fig. 1
		D20-7D		20	20	201.5	60	120	G1/4	HH3.5X10S			
		D25-7D		25	25	256.5	80	155		G3/8	HH4X12S		
		D25-10D				331.5	155	230					
		D32-7D		32	32	321.5	96	192	G1/2	HH5X12	LW-4		
		D32-10D				417.5	192	288					
		D40-7D		40	40	409.5	128	248	-	HH6X12	LW-5		
		D40-10D				529.5	248	368					
Carbide reinforced shank	KAV-	G16-10D		16.2	16	205.5	92	140	-	HH3X10S	LW-2.5	-	Fig. 2
		G20-10D		20.2	20	261.5	120	180		HH3.5X10S			

When cutting the back end, consider the length of the shank grip in addition to the amount of overhang length: See page 13.

●: Standard stock

Head fastening bolt

Shape	Description	Stock	Dimensions (mm)				
			A	B	C	D	E
	HH3X10S	●	M3X0.5	10	5	3	2.5
	HH3.5X10S	●	M3.5X0.6	10	5.5	3	2.5
	HH4X12S	●	M4X0.7	12	7	4	3
	HH5X12	●	M5X0.8	12	8.5	5	4
	HH6X12	●	M6X1.0	12	10	6	5

●: Standard stock


Recommended tightening torque

Shank diameter (mm)	Tightening torque
Ø16	2.2 [N·m]
Ø20	2.2 [N·m]
Ø25	3.0 [N·m]
Ø32	5.0 [N·m]
Ø40	8.5 [N·m]

Precautions


About the dedicated E-sleeve

The shank does not have a flat cut. In order to ensure vibration-proof performance, we recommend using a special sleeve (SHS ****_**) that is sold separately.

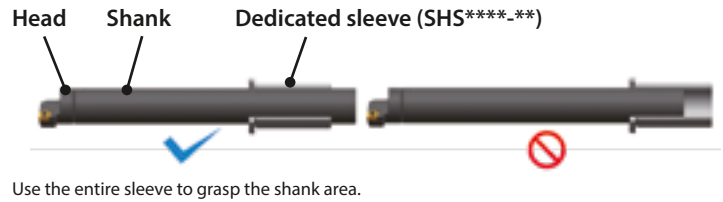

How to adjust cutting edge position

When using a head flat cut part

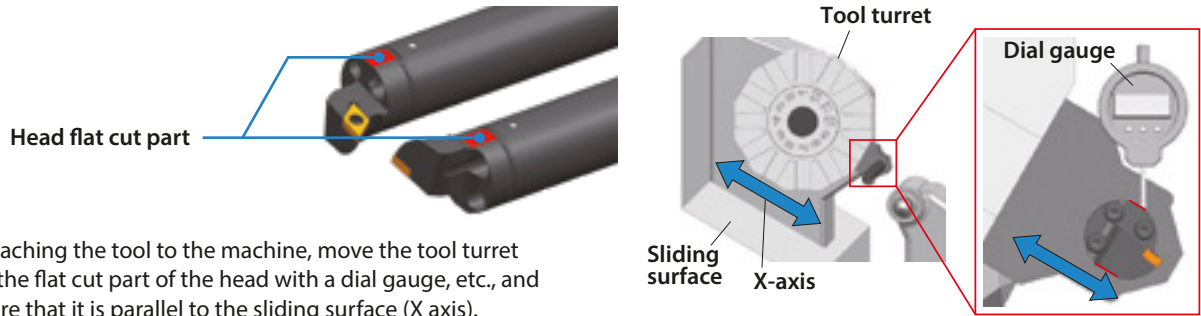


After attaching the tool to the machine, move the tool turret against the flat cut part of the head with a dial gauge, etc., and make sure that it is parallel to the sliding surface (X axis).

When using the reference lines of the shank/dedicated sleeve (E-Sleeve)

Align the reference lines printed on the shank and the dedicated sleeve (SHS ****_**).

It is possible to more easily adjust the cutting edge position than using the head flat cut part.

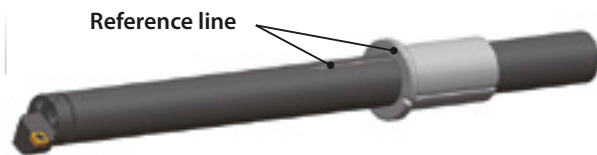

Recommendations for internal coolant

Under high temperatures, the anti-vibration mechanism may deteriorate or be damaged. Please use with **internal coolant**.


The coolant pressure resistance of the shank is 7 MPa. However, when using coolant parts (PR07-ST-UNF 3/8) for internal coolant in the carbide reinforced shank (KAV-G ***), the coolant pressure is 1 MPa. Please be careful.



Available overhang length range

Available overhang length is set for this tool


To adjust the overhang length, please use the reference line printed on the shank.

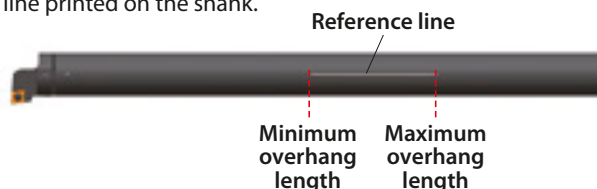

Available overhang length range		
Description	Minimum overhang length	Maximum overhang length
KAV-***-10D	Shank diameter $\times$ 7	Shank diameter $\times$ 10
KAV-***-7D	Shank diameter $\times$ 4	Shank diameter $\times$ 7

Shank cut

If the shank needs to be cut or modified, do so within the cutting range and do not clamp the built-in damping mechanism.

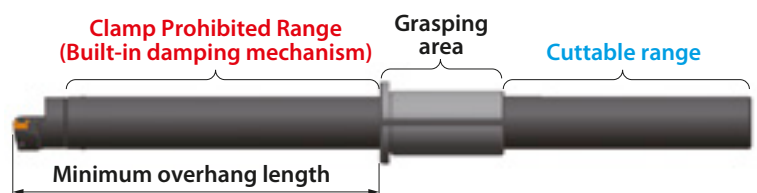

- Use the appropriate inserts and parts. Use of damaged parts may result in tool breakage and injury.
- Do not touch the cutting edge of the insert directly with your bare hands. There is a risk of injury.
- Make sure that there are no foreign materials such as chips in the insert seating area, serrated area, or shank grip area before mounting.
- Do not use the product under chattering conditions. This can lead to damage of the built-in damping mechanism.
- If tool falls or hits the part while machining, do not use it. The impact can cause tool damage and lead to large chattering.
- Avoid high humidity and store at room temperature (about 20°C).

Internal coolant: Piping connections

1 Screw standard for shank back end (pipe connection)

- The thread standard depends on the description.
Please refer to the dimension chart »G« on page 12 when using commercially available piping parts.
- When using our piping components, they must be converted to »UNF3/8« or »G1/8«.
Check the table below and select the required joint parts (sold separately).

Steel shank (Pressure ~ 7 MPa)

Type	Thread standards and conversion joints	
Ø16-7D	G1/8	
Ø20-7D Ø25-7D/10D	G1/8 ⇐ G1/4 J-ST-G1/4-G1/8	
Ø32-7D/10D	G1/8 ⇐ G1/4 ⇐ G3/8 J-ST-G3/8-G1/4 J-ST-G1/4-G1/8	
Ø40-7D/10D	G1/8 ⇐ G1/4 ⇐ G3/8 ⇐ G1/2 J-ST-G1/2-G3/8 J-ST-G3/8-G1/4 J-ST-G1/4-G1/8	


If a leak occurs, use a commercially available washer.

Joint

Shape	Description	Stock	M1	M2	L1	L2
	J-ST-G1/4-G1/8	●	G1/8	G1/4	27	12
	J-ST-G3/8-G1/4	●	G1/4	G3/8	33	13
	J-ST-G1/2-G3/8	●	G3/8	G1/2	37	17

●: Standard stock

Carbide reinforced shank (Pressure ~ 1 MPa)

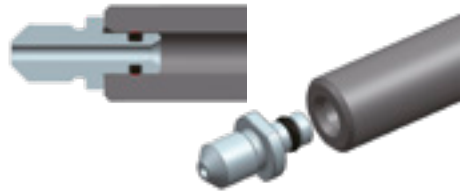Type	Thread standards and conversion joints
Ø16-10D Ø20-10D	 UNF3/8 ⇐ Ø7 Straight Hole *The shank side is not threaded.

Resin joint (With O-ring)

Shape	Description	Stock	Thread standard
	PR07-ST-UNF3/8	●	UNF3/8

You can order only the included O-ring (GR-004-2).


●: Standard stock

2 How to connect when using our plumbing parts

Easy to use with high pressure capable hoses and joints

- Can be used as internal coolant at normal pressure without a high-pressure pump unit
- Banjo bolts for angle hoses available. Supports a wide variety of machines

Piping installation guide

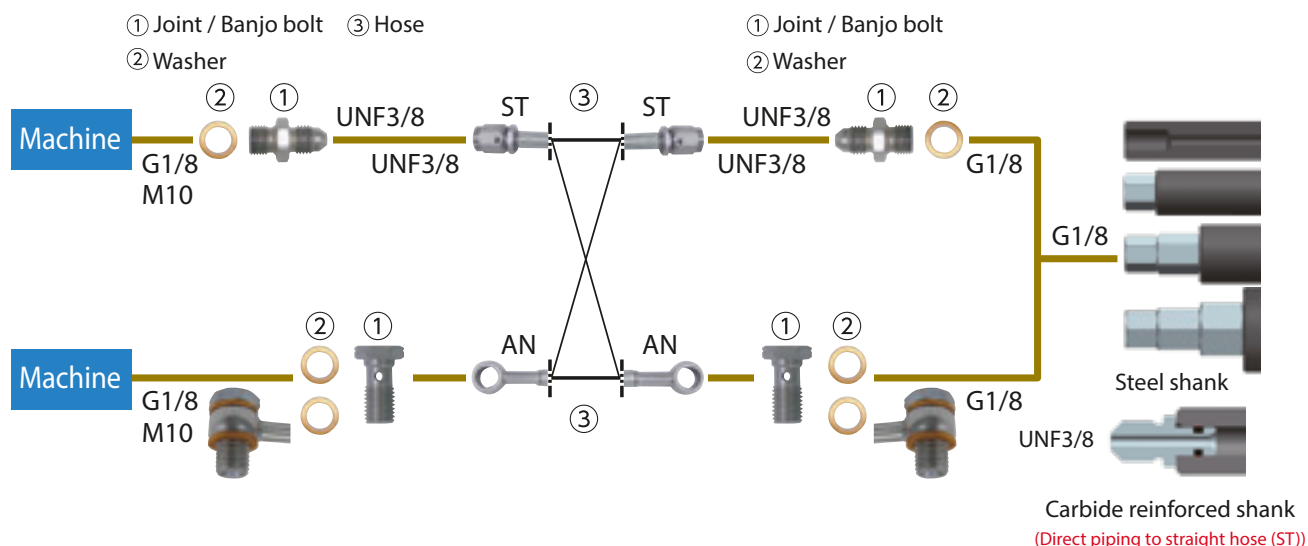

Optional piping parts available (Sold separately)

Choose from parts below to match your machine specifications and piping method.

① Joint or banjo bolt × 2 • ② 2 ~ 4 washers • ③ 1 hose

① Joint / Banjo bolt

Pressure: ~ 30 MPa

Shape	Description	Stock	Thread standard
			Thread connection to the machine
	J-G1/8-UNF3/8	●	G1/8
	J-M10X1.5-UNF3/8	●	M10X1.5
	BB-G1/8	●	G1/8
	BB-M10X1.5	●	M10X1.5

●: Standard stock

② Washer

Pressure: ~ 30 MPa

Shape	Description	Stock
	WS-10	●

* Two washers are required when using banjo bolts

●: Standard stock

③ Hose

Pressure: ~ 30 MPa

Shape	Description	Stock	Thread standard		Dimensions (mm)
					L
	HS-ST-ST-200	●	UNF3/8	UNF3/8	200
	HS-ST-ST-250	●			250
	HS-ST-AN-200	●	UNF3/8	— (Banjo bolt)	200
	HS-ST-AN-250	●			250
	HS-AN-AN-200	●	— (Banjo bolt)	— (Banjo bolt)	200
	HS-AN-AN-250	●			250

●: Standard stock

Precautions

1. Make sure machine door is completely closed before use of these parts.
2. Use appropriate seal for the male thread of the piping parts and make sure the connection is secure. Use plugs to seal off unused coolant holes.
3. Connect and fasten the coolant hose firmly.
4. The use of copper washers may cause leakage but will have no effect on the performance.
5. Commercial piping parts can be used if the thread standards are same. Check the pressure resistance before use.
6. Regularly changing the coolant filter is recommended.

WE KNOW IT'S ALL ABOUT UNDERSTANDING REAL LIFE TO
ENGINEER THE RIGHT SOLUTION, THAT...

***KEEPS YOU
AHEAD***



www.kyocera-unimerco.com

The information contained in this brochure is current as of March 2026.
Duplication or reproduction of any part of this brochure without approval is prohibited.

TZE00273

© 2026 KYOCERA Corporation

