


DRILLING FESTIVAL

2026

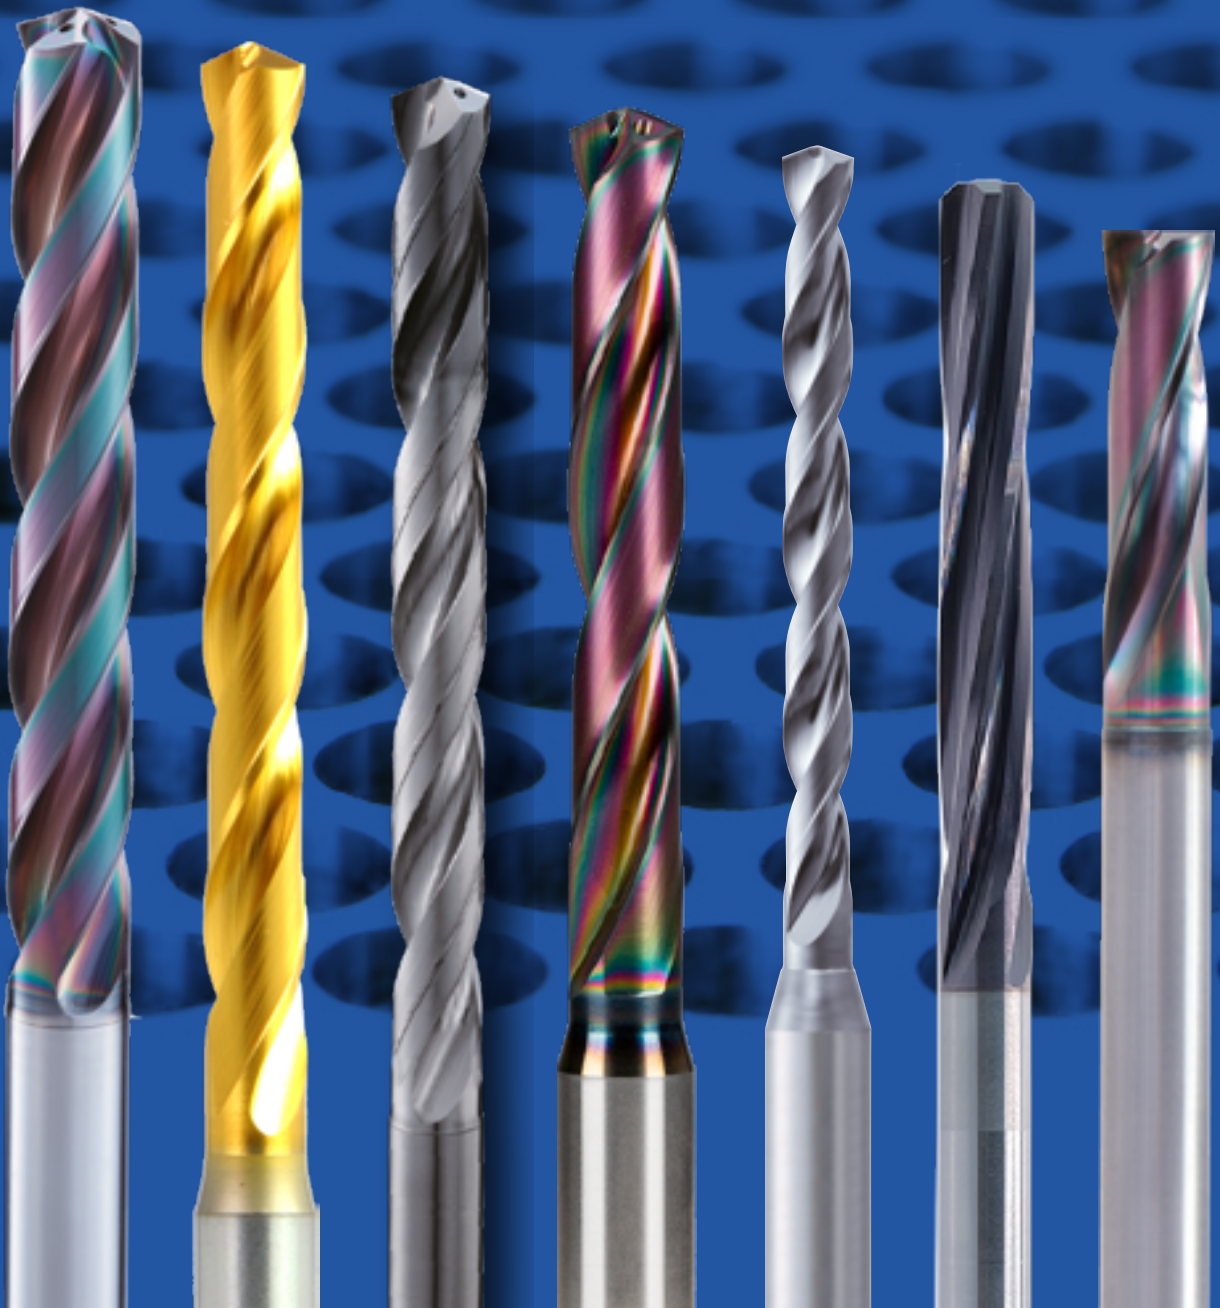


ADO-SUS

Carbide | Drill with internal coolant



- 3xD - 8xD
- Versatile, the first choice for stainless steel and titanium
- From Ø6 with extra-large coolant holes
- Suitable for regrinding service



ADO

Carbide | Drill with internal coolant



- 10xD - 50xD
- Low cutting forces
- Optimal chip formation and removal
- Suitable for regrinding service




ADFO

Carbide | Flat drill with internal coolant



- 3xD
- Available without internal coolant from Ø0.2
- Ideal for pilot holes in uneven surfaces
- Variant with long shaft available



HYP-HPO

Carbide | Drill with internal coolant



- 3xD - 8xD
- Optimal price/performance ratio
- Available with Weldon and Whistle-Notch shanks



HYP-AL

Carbide | Drill



- 3xD + 5xD
- 5xD with internal coolant
- Ideal for aluminum



Carbide

Drills

AD-MICRO


Carbide | Micro-drill



- 4xD + 10xD
- For steel, stainless steel, and titanium alloys

A

Ø 0.5 - 3



0.01 - 0.1

ADO-MICRO


Carbide | Micro-drill with internal coolant



- 2xD - 30xD
- For steel, stainless steel, and titanium alloys

A

Ø 0.7 - 2



0.05 - 0.1

WX-MS-GDS


Carbide | Micro-drill




- 5xD
- For steel, stainless steel, and titanium alloys

A

Ø 0.2 - 5



<Ø2: 0.01



>Ø2: 0.05

ADO-TRS


Carbide | Drill with 3 flutes and internal coolant



- 3xD + 5xD
- First choice for steel and cast iron
- Allows high feed rates

A

Ø 3 - 20



0.1 - 0.5

EX-SUS-GDS


HSS | Drill




- 3xD + 5xD
- Wide range of diameters
- Shank tolerance h7

HSSE


Ø 0.5 - 20



<Ø6: 0.01



Ø6 - 13



>Ø13: 0.5

CRM

Carbide | Reamer



- From \varnothing 0,3 - 13,05 mm in 0,01mm incrementals



AL-CRM

Carbide | Reamer



- For non-ferrous metals
- DLC coating



Application courses at the VB-Techcenter

The joy of drilling | threading | milling

A solid foundation for precise drilling, reliable threading, and efficient milling.



EVENT

vb-tools.com/en/events/

Carbide

HS-OIL-CRM

Carbide | Reamer with internal coolant



- For high-speed machining in various materials
- Spiraled, coated



Reamer

H-CRM

Carbide | Reamer



- For stainless steel, titanium alloys, and hardened steels up to 60HRC
- Spiraled, coated

